


# FITTING INSTRUCTIONS

## NO SEAT AIRBAGS


### FRONT SEATS

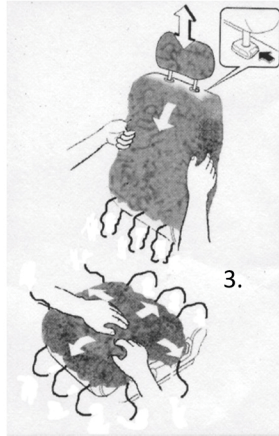

The seat covers are custom made to suit the vehicles without side airbags in the driver and front passenger seats.

1. Remove the headrest. Fit the headrest cover to the shape of the headrest, fasten the strips together.
2. Place the seat cover over the back of the seat and pull down firmly, straightening the cover for a tight snug fit. Push the centre strips through between the seat cushions at the base of the seat back, so they can be tied on the other side.  
Put the base cover over the base of the seat. Straighten to ensure a neat, snug fit.
4. Tie all ties firmly.
5. Cut a small slit in the seat cover where the head rest posts go into the seats and tuck the fabric behind the plastic fitting.
6. Put the head rests back into the seat.

### MIDDLE SEAT

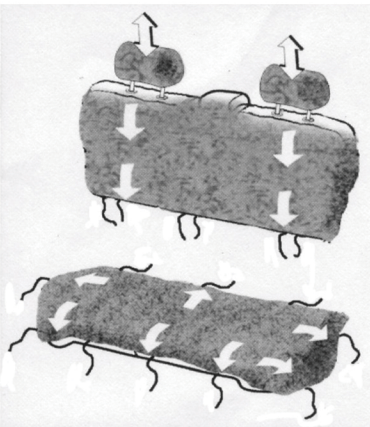

1. Remove the headrest. Fit the headrest cover to the shape of the headrest, fasten the strips together.
2. Drop any split section forward to enable the back of the seat to be fitted to the seat covers.
3. Place the seat cover over the back of the seat and pull down firmly, straightening the cover for a tight snug fit. Push the centre strips through between the seat cushions at the base of the seat back, so they can be tied on the other side.
4. Put the base cover over the base of the seat. Straighten to ensure a neat, snug fit.
5. Tie all ties firmly.
6. Cut a small slit in the seat cover where the head rest posts go into the seats and tuck the fabric behind the plastic fitting.
7. Put the head rests back into the seat.

### BACK SEAT

1. Remove the headrest. Fit the headrest cover to the shape of the headrest, fasten the strips together.
2. Unlock or unscrew the base of the seat to improve access and take the base out.
3. Unlock or unscrew the back of the back out to improve access and take all of the back out.
4. Fit the seat covers on the back part of the back whether it is a one piece or split back. Wrap the cover around the back rest and pull down firmly, straightening the seat covers for a tight, snug fit. Fasten the strips and join them together.
5. Drop the armrest down. Fit covers on and fasten the strips together.
6. Lock the back part of the back into its place after dressing the seat covers on.
7. Fit the seat covers onto the base whether it is a one piece or split back. Wrap the cover around the back rest and pull down firmly. Fasten the strips and join them together for a tight fit. Lock or screw the base of the seat back into its position.
8. Cut a small slit in the seat cover where the head rest posts go into the seats and tuck the fabric behind the plastic fitting.
9. Put the head rests back into the seat.

